


## P.No. 7697332

Altoparlanti coassiali a 2 vie con tweeter al neodimio ad alta efficienza

2 way coaxial speakers with high sensitivity neodymium tweeter

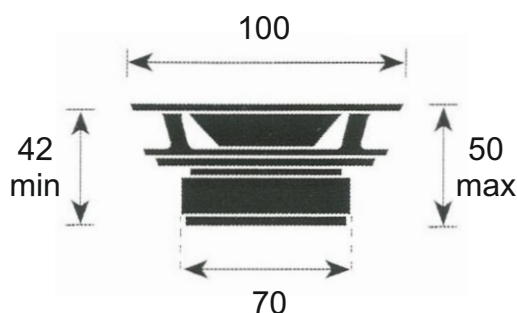

### SPECIFICHE TECNICHE

Diametro	100 mm
Diametro foro installazione	90 mm
Profondità di installazione	42 mm
Dimensioni bobina	19 mm
Materiale cono	Polycarbonato stampato a iniezione
Materiale cestello	Acciaio con verniciatura antivibrazione
Materiale sospensione cono	Gomma elasticizzata
Tweeter	Neodimio ad alta efficienza
Potenza massima	80 W
Risposta in frequenza	90 - 20.000 Hz
Efficienza	91 dB
Impedenza	4 Ohm
Quantità per scatola	Due pezzi
Protezione altoparlante	Involucro in cartone
Imballo	Scatola personalizzata in cartone

### TECHNICAL SPECIFICATIONS

Diameter	100 mm / 4"
Diameter installation hole	90 mm
Installation depth	42 mm
Voice coil	19 mm
Composition cone	Polycarbonate injection
Composition basket	Steel with antivibration paint
Composition cone suspension	Elastic rubber
Tweeter	High sensitivity neodymium
Max power	80 W
Frequency response	90 - 20.000 Hz
Sensitivity	91 dB
Impedance	4 Ohm
Quantity for box	Two pieces
Speaker protection	Carton casing
Package	Branded carton box