




Installation Manual Double DIN Kit

Colour: black
Standard: 381178-25

• Kia Soul 2010->

Compatible with double DIN devices

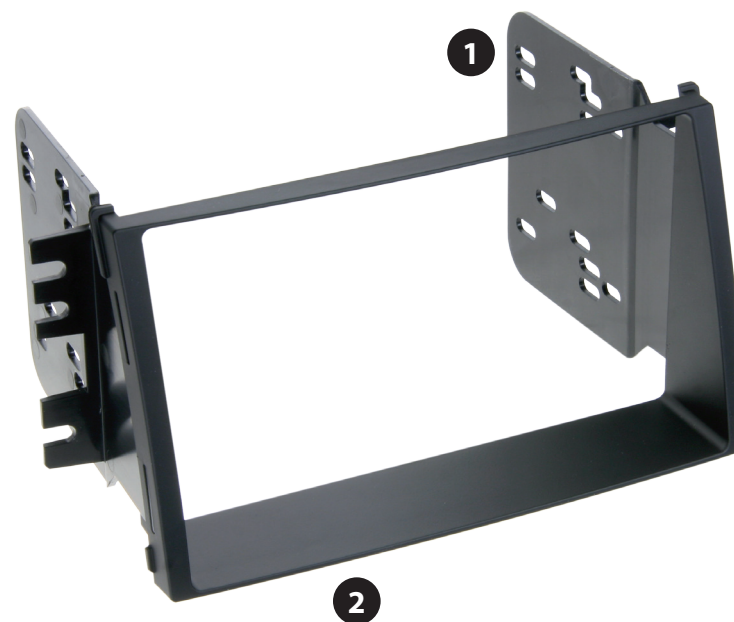




Double DIN Kit contents

- (1) Mounting Brackets
- (2) Facia Plate

KIA SOUL 2010

- 1 Disconnect the negative battery terminal to prevent an accidental short circuit.
- 2 Unclip and remove the radio/climate control trim panel. (Figure A)
- 3 Remove (4) Phillips screws securing the climate control. (Figure B)
- 4 Remove (4) Phillips screws securing the radio. (Figure C)

Continue to kit assembly.

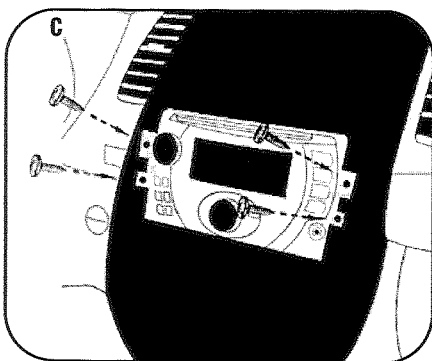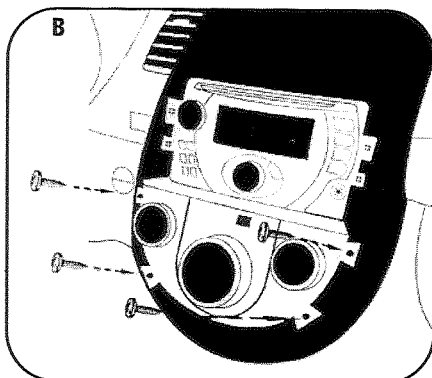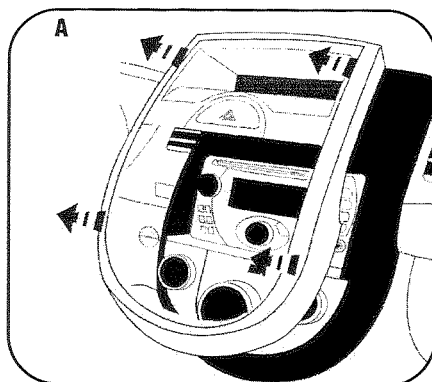

DOUBLE DIN / STACKED ISO DIN HEAD UNIT PROVISIONS

**Note: Refer also to the instructions included with the aftermarket radio.*

- 1 Locate the factory wiring harness in the dash. Metra recommends using the proper mating adapter from Metra or AXCESS. Re-connect the negative battery terminal and test the unit for proper operation.
- 2 Attach the Double DIN brackets to the Double DIN Trim Plate. (Figure A)
- 3 Slide the radio into the bracket/radio housing assembly and secure using the screws supplied with the radio. (Figure B)
- 4 Reassemble dash in reverse order of disassembly.

