




## Installation Manual Double DIN Kit

anthracite:	381300-13-1
anthracite/rubber-touch:	391300-13-1
black:	381300-13-2
black/rubber-touch:	391300-13-2

### • Toyota Auris

Compatible with double DIN devices

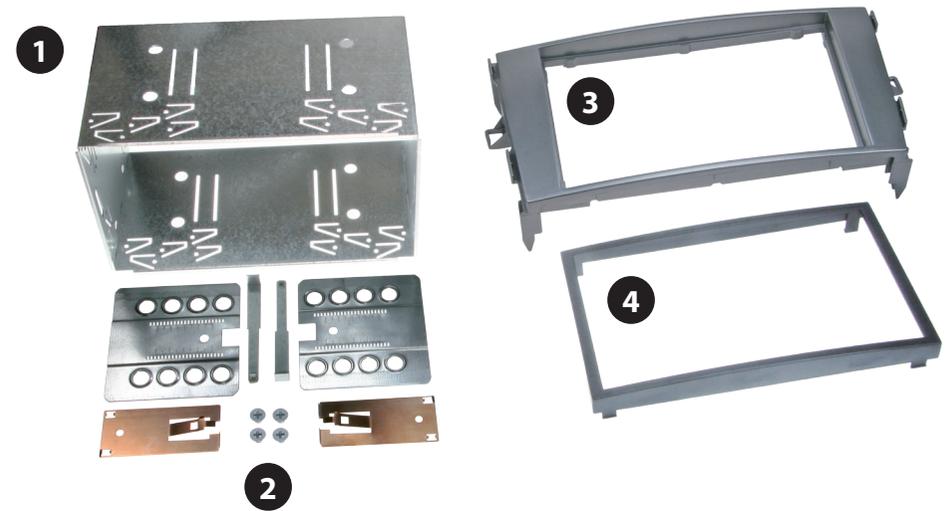

#### Double DIN Set contents

- (1) Metal Frame
- (2) Installation Kit
- (3) Facia Plate
- (4) Trim Frame

## Installation Manual Double DIN Kit



1. Remove the upper part of the silver trim frame




2. Pull up the air vent / hazard switch unit.


Remove 4 screws of the OEM Radio.



3. Remove the OEM head unit.

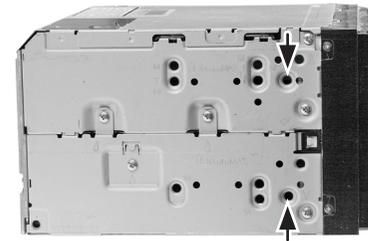

(sample photo)

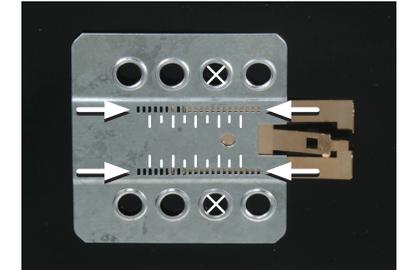

(sample photo)

Mount the metal brackets to the double DIN head unit.

*The position of the copper coloured holder can be adjusted to your needs for perfect fit. (see sample)*



4. Place the fascia plate on the dashboard.

Push the Metal Frame into the fascia plate.

Connect all required circuit points and push the double DIN head unit in the metal frame until it snaps in.

Place the trim frame.

Reinstall everything in reverse order to finish installation.



*All installation work must be performed by a qualified professional installer only. The manufacturer / dealer is not liable for any kind of incidental or indirect damages.*